

© 2020 TE Connectivity. All Rights Reserved.

1	2367324-1	ROT-T*079-B1 A0281-B301 without cap	2
1	2367306-1	Gehäuse kpl. / Bauform T2	1
2367234-1	PARTNUMBER	DESCRIPTION	ITEM NO
REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG. REVISION)			
PARTS LIST			

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
A		ECR-19-014208	04FEB2020	GK

Achtung:
Die angegebenen Aderpaare sind einmal auf 25mm
verseilt : blau und gelb / rot und schwarz /
rotweiss und gelbweiss



Attention:
The specified cable pairs are twisted once at 25mm :
blue and yellow / red and black /
red-white and yellow-white

Resolverstator u.-rotor nur paarig verwenden !

Use only paired stator and rotor !

- 1 Gesamtschlag im eingebauten Zustand
concentricity in installed situation
- 2 Axialversatz
axial displacement

Signal	conductor colouring
S1(COS+)	RED
S2(SIN+)	YELLOW
S3(COS-)	BLACK
S4(SIN-)	BLUE
R1(REF+)	RED-WHITE
R2/R3(REF-)	YELLOW -WHITE

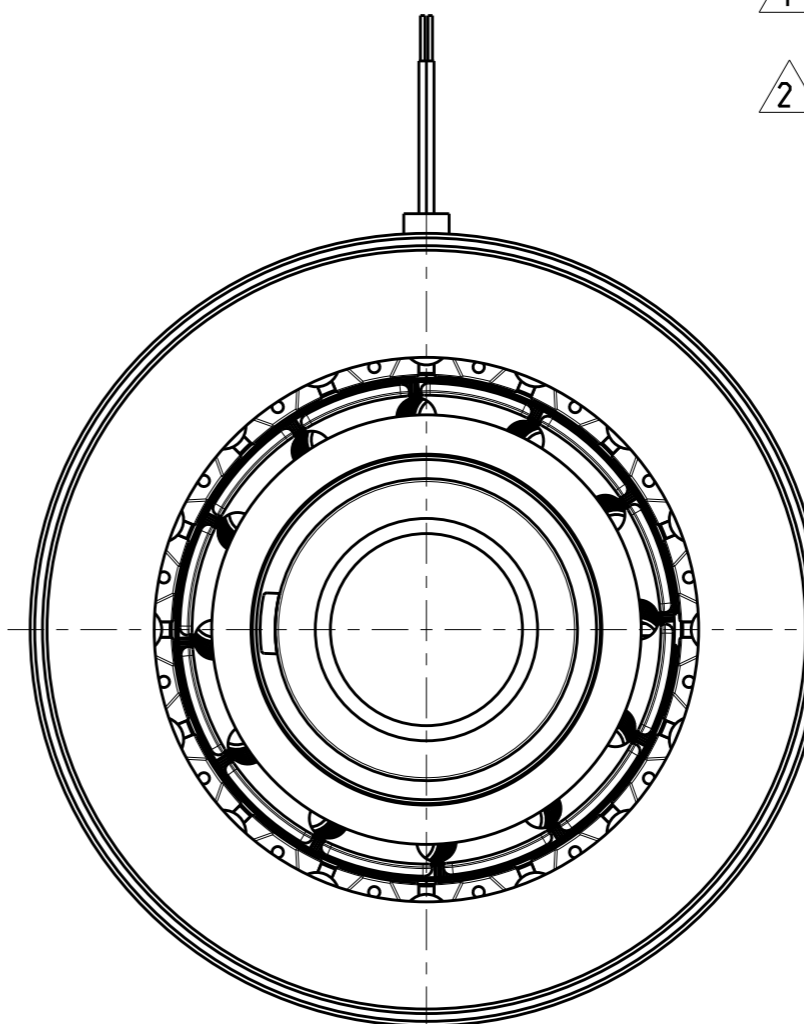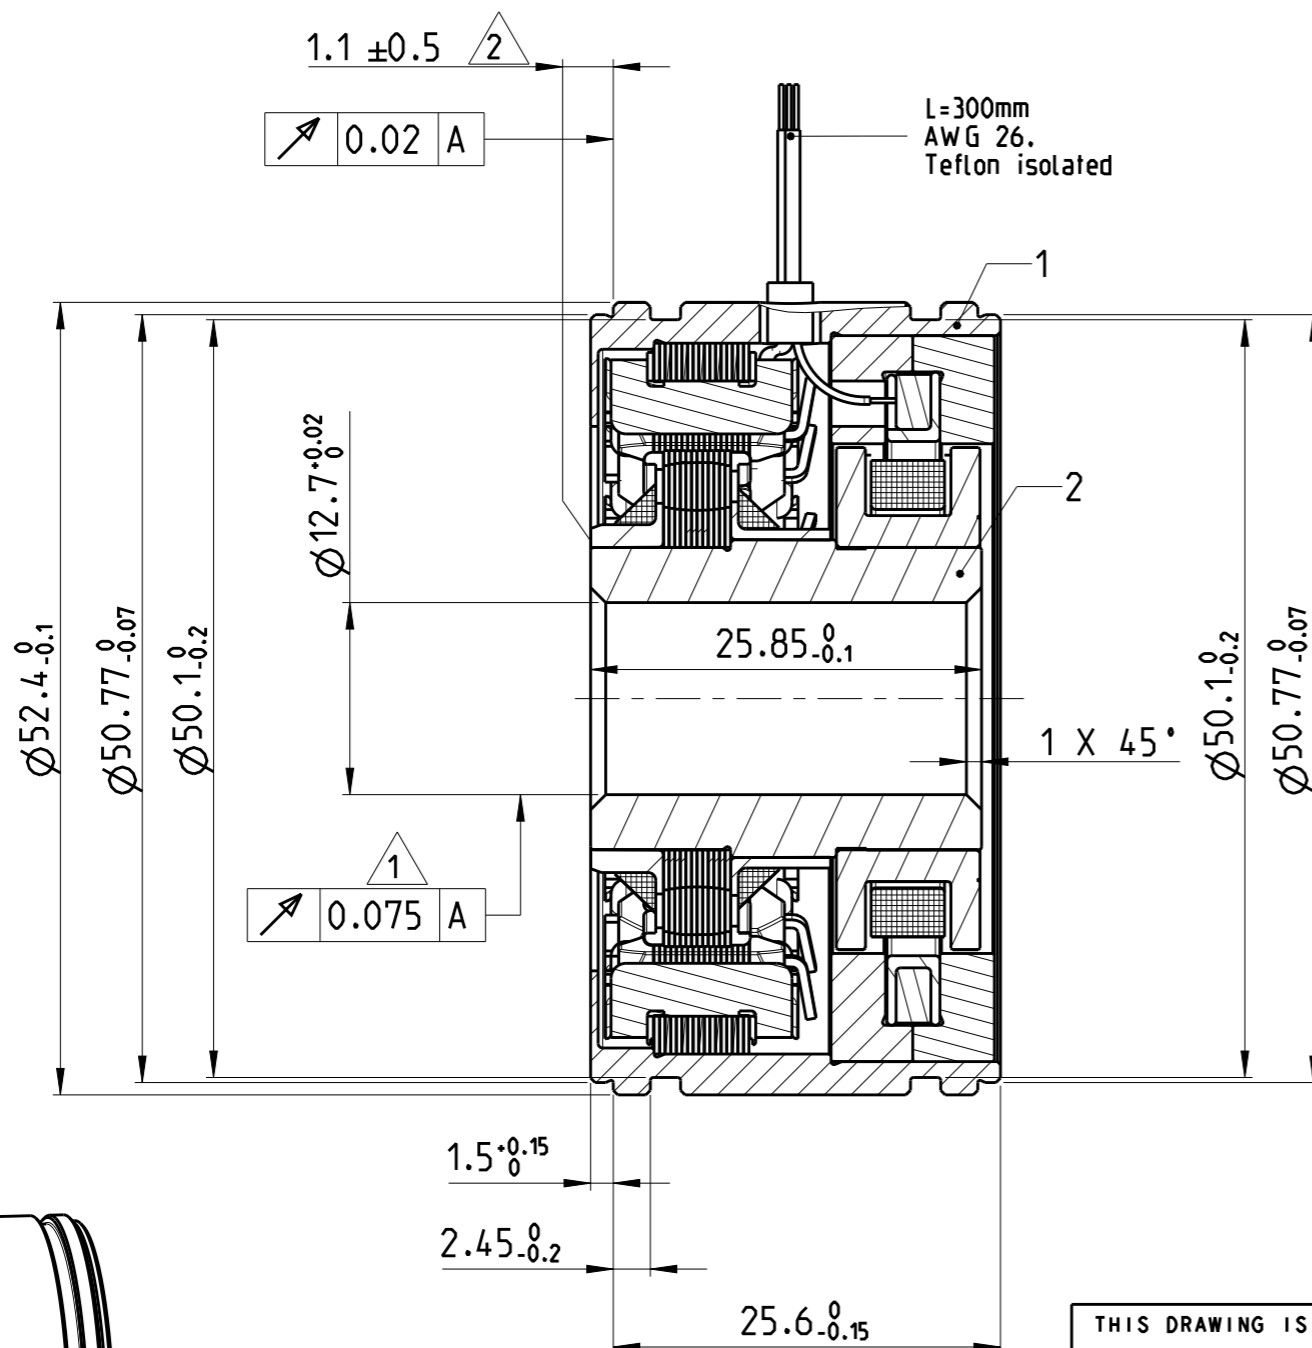

DIMENSIONS WITHOUT TOLERANCES : DIN ISO 2768-m

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 20 JAN 2020 GOPALAKRISHNA HV			
		CHK 20 JAN 2020 SARFRAZ BILAL			
		APVD 20 JAN 2020 ONDREJ DUSAN		NAME HOLLOW SHAFT RESOLVER / SZ.21 TYPE T1 CrMo V23401-T1079-B101	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±°		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL		FINISH		WEIGHT	
-		-		-	
CUSTOMER DRAWING				SCALE 2:1 SHEET 1 OF 1 REV A	