© 2020TE Connectivity. All Rights Reserved.

1	2367320-1	Rotor komplett Typ-B1 A0281-B300 without cap	2
1	2345884-1	Gehaeuse komplett Bauform -T2 CrMo+FeSi Metal Sheets	1
2367236-1	PARTNUMBER	DESCRIPTION	ITEM NO
-	REVISION OF EACH ASSY NO. (WHEN BLANK. USE DWG. REVISION)		
	PARTS LIST		

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECR-19-014208	04FEB2020	GK	OD

Ø50h7	+0 / -0.025

Achtung:
Die angegebenen Aderpaare sind einmal auf 25mm verseilt : blau und gelb / rot und schwarz / rotweiss und gelbweiss

Resolverstator u.-rotor nur paarig verwenden !

Attention:
The specified cable pairs have to twist once at 25mm : blue and yellow / red and black / red-white and yellow-white

Use only paired stator and rotor !

1 Gesamtschlag im eingebauten Zustand
concentricity in installed situa

2 Axialversatz
axial displacement

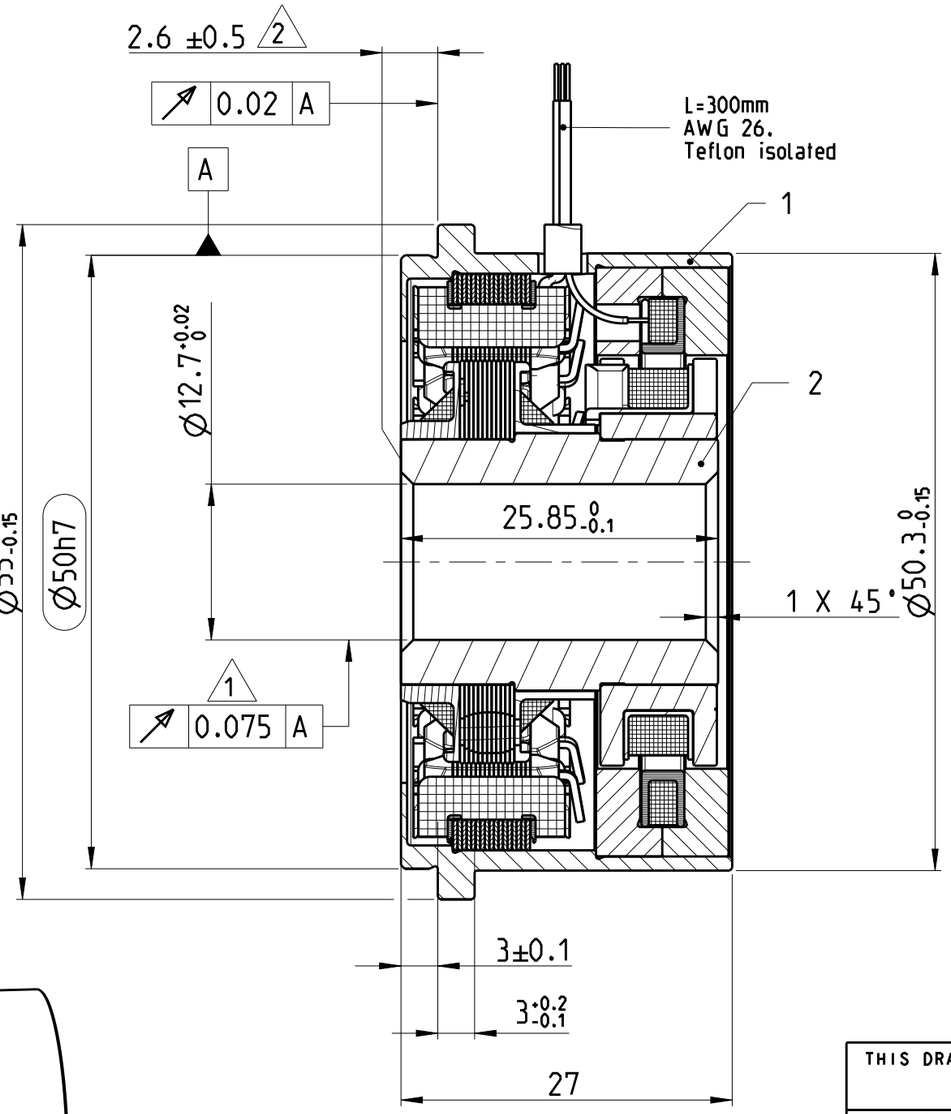

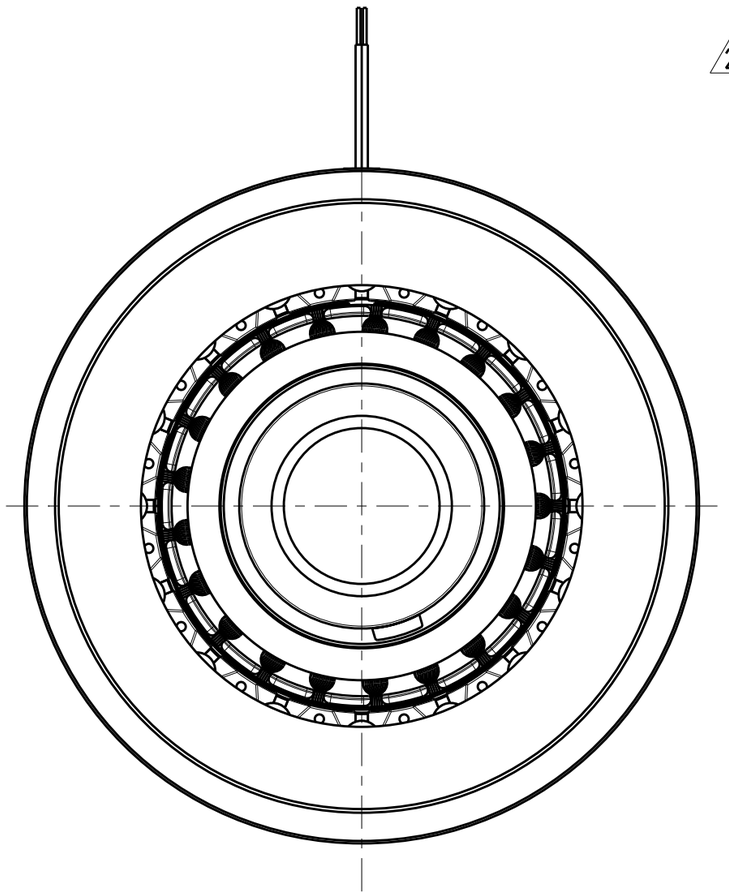

Signal	conductor colouring
S1(COS+)	RED
S2(SIN+)	YELLOW
S3(COS-)	BLACK
S4(SIN-)	BLUE
R1(REF+)	RED-WHITE
R2/R3(REF-)	YELLOW-WHITE

1:1

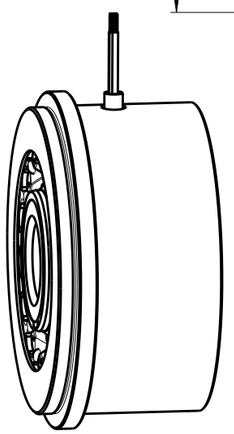

DIMENSIONS WITHOUT TOLERANCES : DIN ISO 2768-m

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±1°

MATERIAL - -

FINISH - -

DWN GOPALAKRISHNA HV 20JAN2020
CHK SARFRAZ BILAL 20JAN2020
APVD ONDREJ DUSAN 20JAN2020

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

NAME HOLLOW SHAFT RESOLVER / SZ.21 TYPE T2 CrMo V23401-T2074-B101

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2367236	

SCALE 2:1 SHEET 1 OF 1 REV A

1470-19 (3/13)